JOSAM 32100 SERIES COATED CAST IRON FLOOR DRAIN, TWO-PIECE BODY WITH DOUBLE DRAINAGE FLANGE, WEJLOC ® NON-PUNCTURING FLASHING COLLAR, WEEPHOLES, BOTTOM OUTLET, ROUND TOP, MEDIUM-DUTY LOOSE-SET ANTI-TILTING SUPER-FLO ® GRATE WITH PERIMETER DRAINAGE SLOTS.


FLOOR DRAIN

9" ROUND TOP, SUPER-FLO®


**SERIES** 

32100

GRATE FREE AREA: 27 IN<sup>2</sup> SLOT WIDTH 3/8" (MEETS ADA)

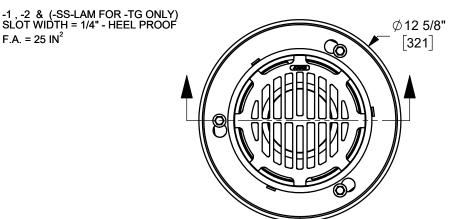

- ♦ GASKET CONFORMS WITH ASTM-C564
- \*ADD 1/4" WHEN FURNISHED WITH NIKALOY OR BRONZE TOP (-1 OR -2)
- \*\* ADD 1/4" WHEN FURNISHED WITH STAINLESS STEEL TOP (-SS-LAM FOR -TG ONLY)

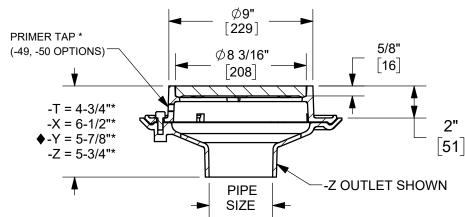

 $^{\star}$  FOR TRAP PRIMER CONNECTION BELOW DRAIN, USE 88400 OR 88450 ADAPTER.

|   | 2"      | PIPE SIZE                                       | -39    | SOLID CAST IRON COVER                                      |
|---|---------|---|--------|--|
|   | 3"      | PIPE SIZE                                       | -VP    | SECURED GRATE, VANDAL-PROOF SCREWS                         |
|   | 4"      | PIPE SIZE                                       | -ARE   | ACID-RESISTING EPOXY                                       |
|   | 6"      | PIPE SIZE, NO-HUB -SEE SEPARATE SUBMITTAL 32106 | -44    | FIXED EXTENSION COLLAR, CAST IRON ( SPEC. HT. ) 2" STD.    |
|   | -AE     | LEVELEZE ADJUSTABLE EXTENSION                   | -44-92 | FIXED EXTENSION COLLAR, GALVANIZED ( SPEC. HT. ) 2" STD.   |
|   | -81     | SLOTTED CAST IRON BUCKET                        | -49    | 3/4" PRIMER TAP  |
|   | -TG     | TRACTOR GRATE **                                | -50    | 1/2" PRIMER TAP  |
|   | -LC1    | LOCKING COVER, SATIN FINISH NIKALOY             | -84    | STAINLESS STEEL MESH BUCKET LINER                          |
| - | -LC2    | LOCKING COVER, SATIN FINISH BRONZE              | -88    | SUPPLEMENTARY STRAINER                                     |
|   | -1      | SATIN FINISH NIKALOY TOP - HEEL PROOF           | -92    | GALVANIZED CAST IRON PARTS                                 |
|   | -2      | SATIN FINISH BRONZE TOP - HEEL PROOF            | -66    | NO-HUB SIDE OUTLET   |
|   | -7      | DUCTILE IRON GRATE                              | -HP    | HEEL-PROOF GRATE, CI, 5/16" SLOT WIDTH, 25 SQ IN FREE AREA |
|   | -11     | EXTRA-HEAVY DUTY GRATE, CAST IRON               | -TSI   | TRAP SEAL INSERT   |
|   | -13     | DOME GRATE, CAST IRON                           | -T     | THREADED OUTLET  |
|   | -13-1   | DOME GRATE, NIKALOY                             | -X     | INSIDE CAULK OUTLET  |
|   | -13-2   | DOME GRATE, BRONZE                              | -Y     | HUB OUTLET WITH GASKET                                     |
|   | -15     | CHAINED GRATE                                   | -Z     | NO-HUB OUTLET  |
|   | -SS-LAM | STAINLESS STEEL - LAMINATE - HEEL PROOF**       |        |  |

DATE OF LAST CHANGE: 03/12/19

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.



NOTES